



DR-05W / DR-05W 24V / DR-05B / DR-05B 24V white/black

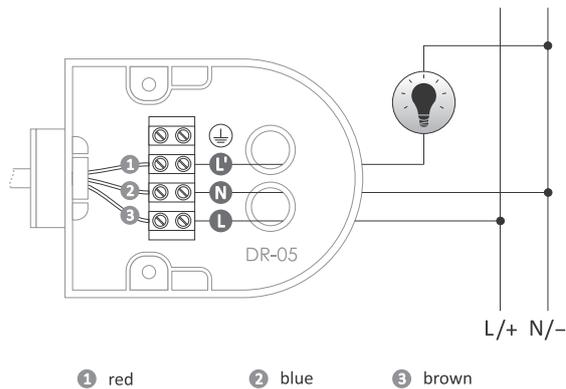

power supply	
DR-05B/DR-05W	195÷265 V AC
DR-05B 24 V/DR-05W 24 V	9÷30 V DC
maximum load current (AC-1)	5 A
twilight activation threshold	3÷2000 lx
motion of detection	0.6÷1.5 m/s
switch-on time	10 s÷7 min.
horizontal detection field	0÷180°
vertical detection field	0÷90°
maximum radius detection (T<24°C)	5÷12 m
range of head rotation (horizontally)	180°
range of head rotation (vertically)	90°
sensor mounting height	1.8÷2.5 m
power consumption	0.5 W
terminal	1.5 mm ² screw terminals
tightening torque	0.3 Nm
working temperature	-20÷40°C
dimensions	
head set horizontally	70×205×45 mm
head set vertically	70×140×110 mm
mounting	surface
ingress protection	IP44


! The sensor head can move in two planes, allowing for precise adjustment of the detection field depending on the individual requirements of the user.

DR-06W / DR-06W 24V / DR-06B / DR-06B 24V white/black

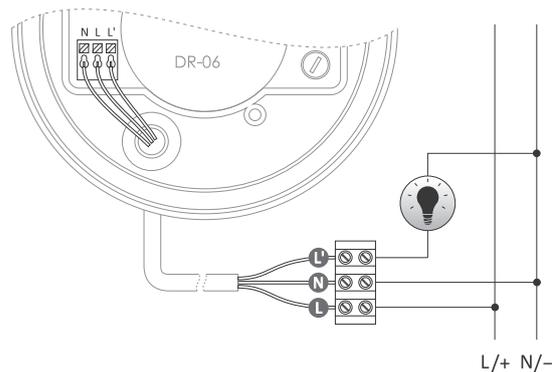

power supply	
DR-06B/DR-06W	195÷265 V AC
DR-06B 24 V/DR-06W 24 V	9÷30 V DC
maximum load current (AC-1)	4 A
twilight activation threshold	10÷2000 lx
motion of detection	0.6÷1.5 m/s
switch-off time	3 s±12 min. (±3 min.)
horizontal detection field	360°
maximum radius detection (for h=2.3÷3.5 m, T<24°C)	5 m
sensor mounting height	2.5÷3.5 m
power consumption	
standby	0.10 W
on	0.45 W
terminal	1.0 mm ² screw terminals
tightening torque	0.25 Nm
working temperature	-10÷40°C
dimensions	∅115 mm, h=47 mm
mounting	surface
ingress protection	IP40

DR-07 ceiling-mounted, built-in

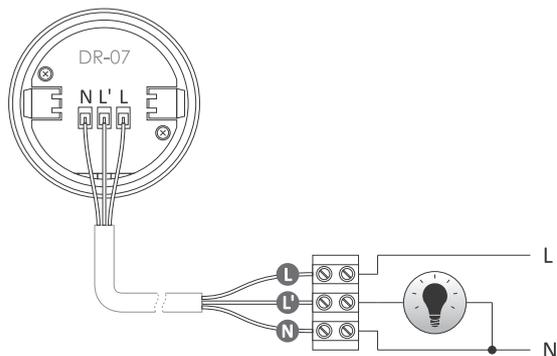

power supply	
DR-07	195÷265 V AC
maximum load current (AC-1)	1.5 A
twilight activation threshold	10÷2000 lx
motion of detection	0.6÷1.5 m/s
switch-off time	3 s±9 min. (±2 min.)
horizontal detection field	360°
maximum radius detection (for h=2.3÷3.5 m, T<24°C)	4 m
sensor mounting height	2.5÷3.5 m
power consumption	
standby	0.10 W
on	0.45 W
terminal	1.0 mm ² screw terminals
tightening torque	0.25 Nm
working temperature	-10÷40°C
dimensions	
external	∅50 mm, h=52 mm
groove	∅39 mm, h=35 mm
mounting hole	∅40 mm
screw spacing	33 mm
mounting	for built-in
ingress protection	IP20